


DISTRIBUTED LINE LEVEL FROM STUDIO MIC PREAMP

Three Distributed Line-Level Outputs from a Single Microphone in a Voice-Over Studio

STM-LDA3
Studio Quality Microphone Preamp
with phantom - 3 line outputs

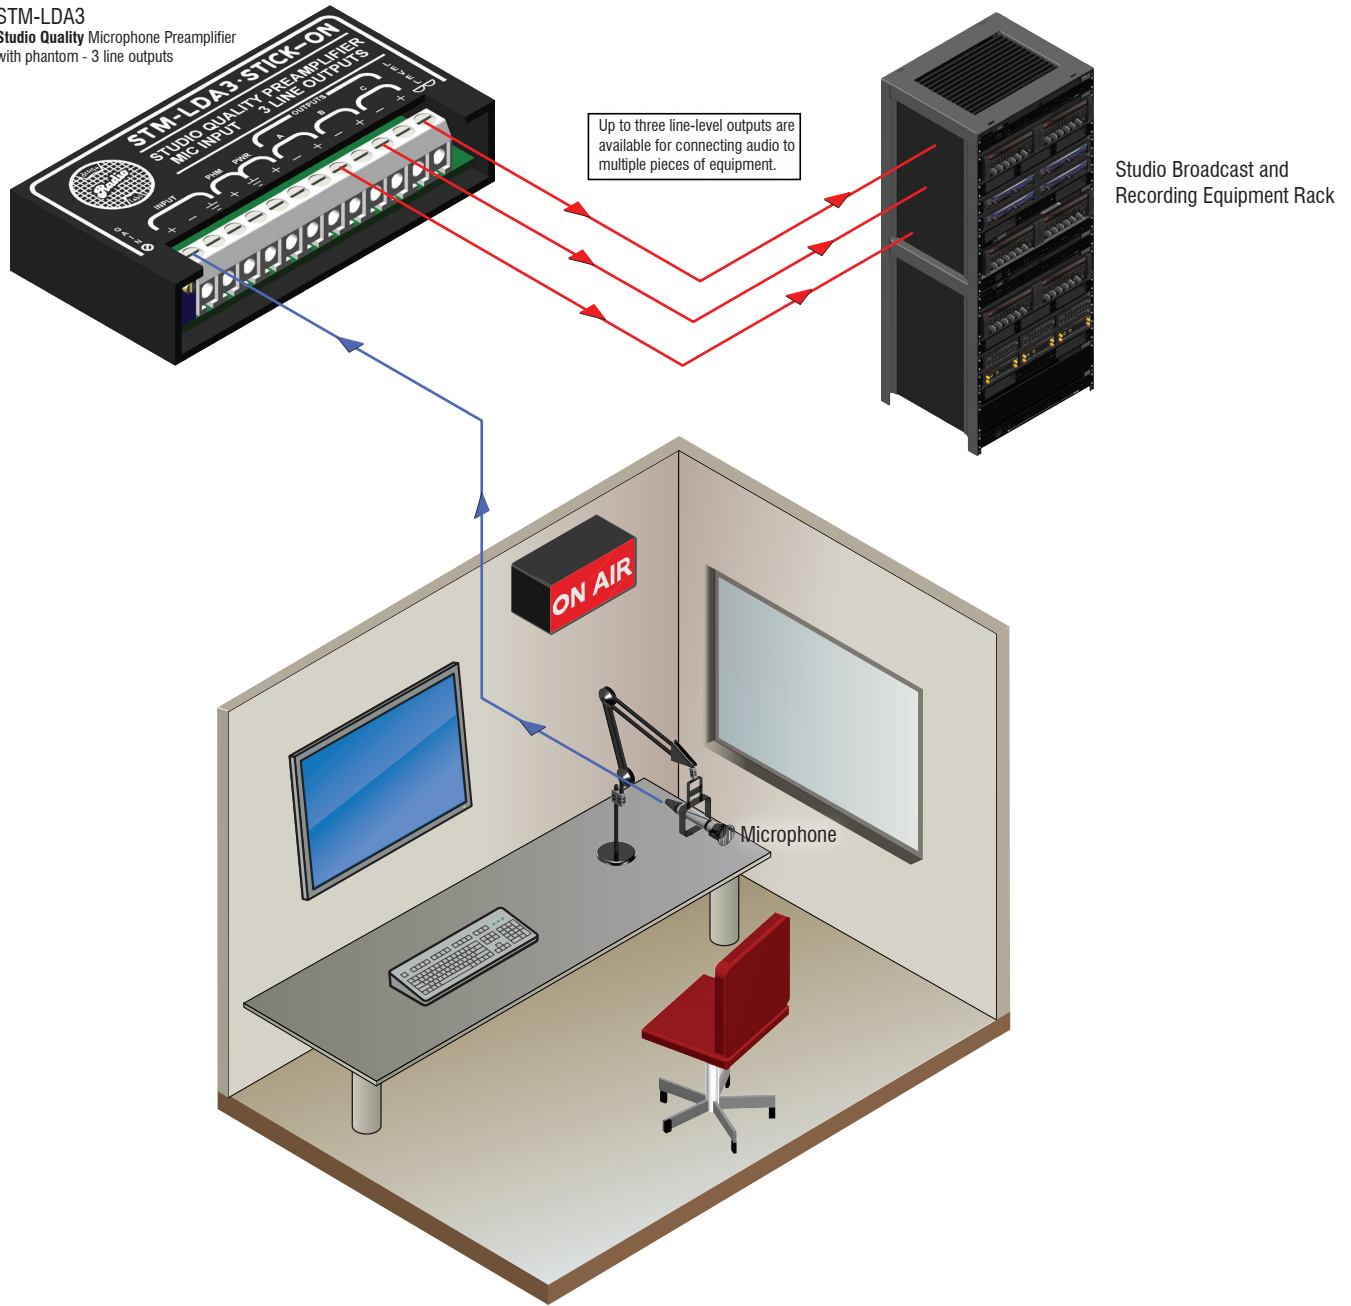

Description:

The STM-LDA3 Studio Quality Mic Preamp with Distributed Outputs is used in this voice-over studio to bring the microphone signal to line level and distribute it to several different pieces of equipment. Designed for use in applications such as broadcast, recording and professional sound reinforcement, the STM-LDA3 provides low-noise, low-distortion performance in a small, economical package. The 1200 Ω balanced input accepts a wide variety of microphone input levels from professional, low-impedance dynamic and condenser microphones without loading the microphone. A multi-turn trimmer provides for precise gain adjustment which is simplified with the inclusion of RDL's unique Dual-LED VU meter. Each of the three low-impedance outputs may be connected to balanced or unbalanced loads.

Parts List	
Product	QTY
ST-LDA3	1

Recommended Pwr. Supplies	
Product	QTY
PS-24AS 24 Vdc 500 mA	1

Line Color Key	
Red	Line Level Audio Signal
Green	Loudspeaker Level
Purple	Control Signal
Yellow	Video
Blue	Mic Level Audio Signal
Light Green	Ground
Brown	Power
Orange	Miscellaneous